

**SERIE NORDIK EVOLUTION**  
VENTILATORI DA SOFFITTO REVERSIBILI

**Dati tecnici**

PRODOTTO	CODICE	COLORE	V~50Hz	W max	A max	RPM	PORTATA MAX m <sup>3</sup> /h	N° PALE	PESO Kg
NORDIK EVOLUTION R 90/36"	61750	BIANCO	220-240	70	0.34	200	11592	3	6.4
NORDIK EVOLUTION R 120/48"	61751	BIANCO	220-240	70	0.34	198	13810	3	6.8
NORDIK EVOLUTION R 120/48"	61754	ARGENTO	220-240	70	0.34	198	13810	3	6.8
NORDIK EVOLUTION R 120/48"	61755	RADICA	220-240	70	0.34	198	13810	3	6.8
NORDIK EVOLUTION R 120/48"	61756	NERO	220-240	70	0.34	198	13810	3	6.8
NORDIK EVOLUTION R 120/48"	61733	ORO BIANCO	220-240	70	0.34	198	13810	3	6.8
NORDIK EVOLUTION R 140/56"	61752	BIANCO	220-240	70	0.34	197	16586	3	7.1
NORDIK EVOLUTION R 140/56"	61757	ARGENTO	220-240	70	0.34	197	16586	3	7.1
NORDIK EVOLUTION R 140/56"	61758	RADICA	220-240	70	0.34	197	16586	3	7.1
NORDIK EVOLUTION R 140/56"	61759	NERO	220-240	70	0.34	197	16586	3	7.1
NORDIK EVOLUTION R 140/56"	61734	ORO BIANCO	220-240	70	0.34	197	16586	3	7.1
NORDIK EVOLUTION R 160/60"	61753	BIANCO	220-240	70	0.34	193	17011	3	7.6

**Dati tecnici secondo regolamento 206/2012/UE**




	PARAMETRO DI RIFERIMENTO	UNITÀ DI MISURA	NORDIK EVOLUTION R 90/36"	NORDIK EVOLUTION R 120/48"	NORDIK EVOLUTION R 140/56"	NORDIK EVOLUTION R 160/60"
	<b>CODICE</b>		<b>61750</b>	<b>61751 61754 61755 61756 61733</b>	<b>61752 61757 61758 61759 61734</b>	<b>61753</b>
Portata d'aria massima	F	m <sup>3</sup> /min	193.20	230.17	276.43	283.52
Potenza assorbita del ventilatore	P	W	70	70	70	70
Valori di esercizio	SV	(m <sup>3</sup> /min)W	2.760	3.288	3.949	4.050
Modo attesa (stand-by)	PSB	KW	-	-	-	-
Livello di potenza sonora	LWA	dB(A)	46.1	49.1	52.6	55.6
Velocità dell'aria	C	m/sec	3.52	2.36	2.08	1.63

Nome di misura per valore di esercizio

IEC 60879; EN62301; UNI EN ISO 3741

Referente per ulteriori informazioni: VORTICE Spa, Strada Cerca, 2 - 20067 Zoate di Tribiano (MI) Italia

## Dimensioni

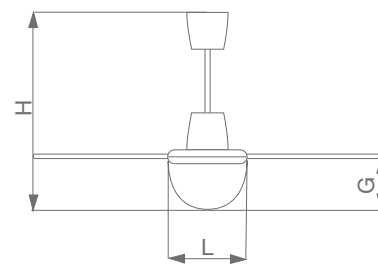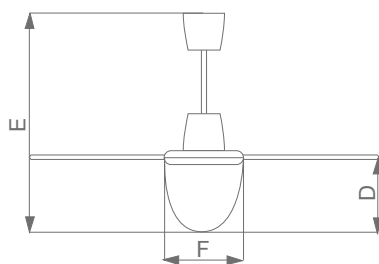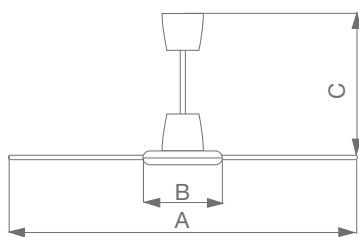

con EVOLUTION LIGHT KIT

con EVOLUTION LIGHT KIT ES

PRODOTTO	ØA	ØB	C	D	E	ØF	G	H	ØL
NORDIK EVOLUTION R 90/36"	980	298	495	229	724	291	145	640	291
NORDIK EVOLUTION R 120/48"	1248	298	495	229	724	291	145	640	291
NORDIK EVOLUTION R 140/56"	1488	298	495	229	724	291	145	640	291
NORDIK EVOLUTION R 160/60"	1590	298	495	229	724	291	145	640	291

Quote in mm

